

General Specifications

Mechanical

Material:	Stainless Steel (304) Case / Bezel Wear & Chemical resistant Polyester overlay
Mounting:	Cased, Bezel, Rear or Flush mount
Dimensions (mm):	497 (W) x 240 (H) x 44.5 (D) cased
Weight (g):	3.4Kg cased, 1.5Kg uncased
Keys:	Sealed mechanical
Key Travel:	0.4mm
Life Expectancy:	>1 million switch cycles
Operating Force:	160gf ± 50gf

Environmental

Operating Temp.:	-20°C to +60°C
Storage Temp.:	-40°C to +85°C
Relative Humidity:	95% non-condensing
Seal:	IP67
Vibration:	5G, 5-2KHz any plane

Electrical and Electronic

Supply Voltage:	5V DC ± 5%
Supply Current:	<50mA (non-illuminated)
Interface:	USB on 2 metre cable

General

MTBF:	60,000 hours
MTTR:	20 minutes
Warranty:	3 year standard return to base Extendable to 5 years if required

Options and Customisation

Options

Interface:	USB / PS2 / AT / RS232 / RS422 / RS485 / XT/ TTL / DEC / SUN
Mechanics:	Stainless steel case or bezel



Customisation

Colour:	Full customisation of case colour and Logos available
Coding:	Key operations can be customised to fit software needs
Dimensions:	Physical dimensions can be customised
Front Sheet:	Language and custom variants
Key Illumination:	Full or part key illumination via white LED back lighting





Dimensions



REAR MOUNT

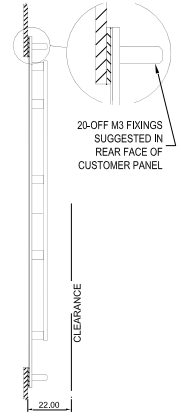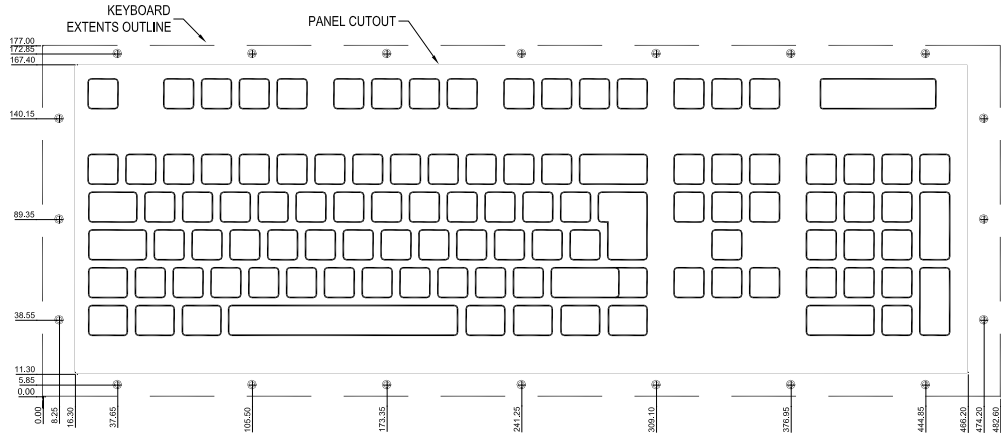

BEZEL MOUNT

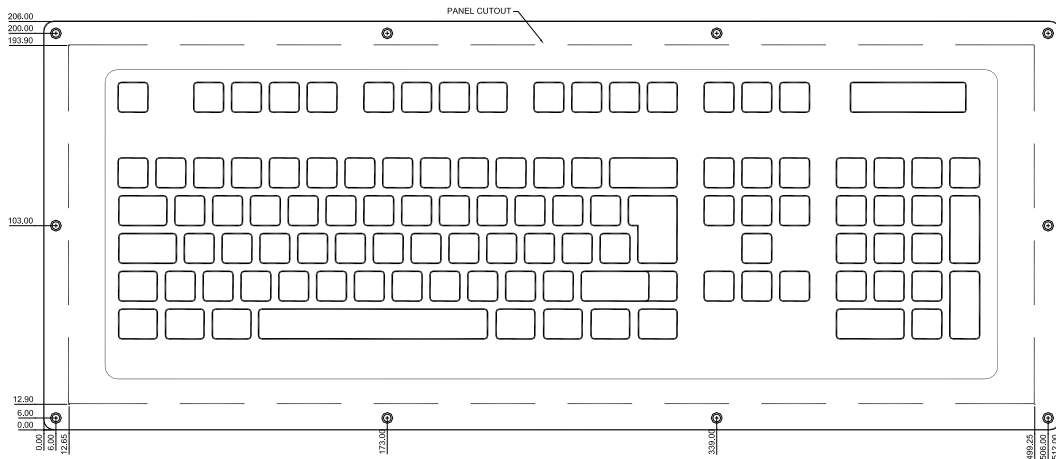

FLUSH MOUNT

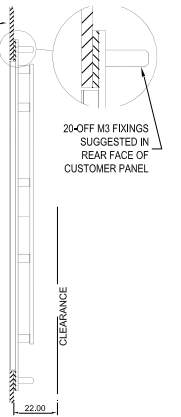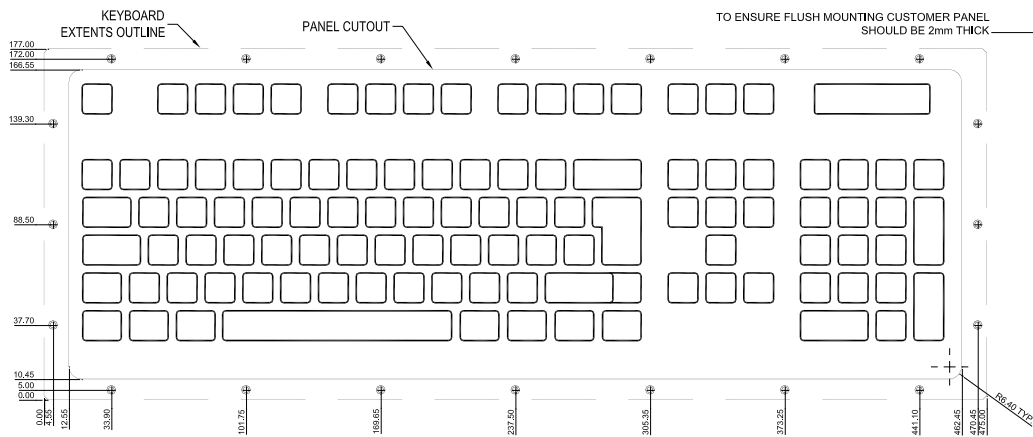

CASED

